


CERFIX PROTEC CPQV

Profiles for balconies and terraces

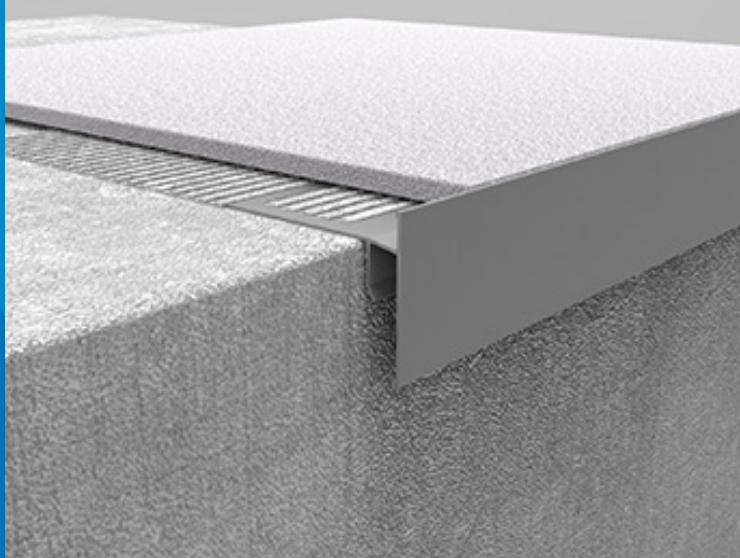

DESCRIPTION

Protec CPQV is a painted aluminium edge trim for use when laying terraces and balconies. Designed to carry rain water off sloped floors, it has a double flashing and rim which sits over the tile and provides drainage. The hidden draining holes allow any water or humidity trapped below the tile to run off. Transition elements are available for internal and external corners and joints between profiles.

MATERIALS

Coated aluminium

Al-Mg-Si aluminium, heat-treated in T6 (6060 T6).

The profiles are bent first then painted. They present a good resistance to chemical and atmospheric agents but not to mechanical stress which damages the surface coating. Concrete, adhesive, grouting materials and detergents must be immediately removed from the visible surface of the profile

General note on metals

Aluminum is not resistant to all chemical compounds. Consequently, contact with particularly aggressive products like hydrochloric acid (HCl) and phosphoric acid (H₃PO₄) should be avoided.

Products generally used to clean stone, ceramic and porcelain tiles, such as muriatic acid, ammonia and bleach, damage the surface finish on the metal and can cause intense corrosion. Moreover, any residues of concrete, adhesive, and grouting materials must always be removed from the surface of the profiles as quickly and delicately as possible.

If adhesive tape is used to cover the profile, it must not be left any longer than an hour.

FIXING

Fixing with adhesive

Clean and prepare the laying surface, removing any dust or loose parts.

Remove the profile from the package and check that the thickness of the flooring to be laid is the same as the dimension of the profile selected (see label).

Measure the length of the perimeter to be protected and pre-cut the profiles, allowing 5mm space between each element.

Stick tape on the inner surface of the profile, covering the draining holes to stop them from being blocked when the concrete layer is laid.

Lay the profile along the edge of the concrete screed and the corners on the fresh waterproofing mortar or adhesive, then fix in place with steel nails through the holes in the perforated flanges.

Cover all the gaps between elements using the relevant joints.

When the first layer of waterproofing mortar or adhesive used to secure the profile has matured, create the waterproofing layer with **WPstop 3** or waterproofing cement layers (following the manufacturer's instructions).

When this has also matured, remove the tape protecting the drainage holes and lay the flooring over the top, making sure no adhesive gets into the holes and leaving a space of around 5 mm between the tile and the edge of the profile. This gap should be filled with elastic sealant on top of a line of polyethylene foam.

We recommend using CPGV for pavements and structures receiving foot traffic.

CARE AND MAINTENANCE

Care and maintenance procedures for the materials used to make these profiles depends largely on the type of alloy and/or finish used.

The instructions provided below describe the operations to be performed on the profile to restore it as much as possible to its original condition.

The purpose of this document is to provide as many general indications as possible to guide you on when and how to clean the product, but they should also be verified on a case-by-case basis.

It should be pointed out there are specific responsibilities in each part of the product's life cycle, starting from when it is installed the first time.

Aluminium

No special maintenance is required and aluminium products can be easily treated with colourless alcohol in a water solution or using ordinary detergents, provided they do not contain acid (hydrochloric or hydrofluoric).

Detergent products made by multiple manufacturers and sold under a variety of commercial brands can generally be used for cleaning.

Generally speaking, there are three types of products:

- Alkaline
- Neutral
- Acid

For cleaning purposes, we recommend using a neutral detergent diluted in water then rinsing with water only, using a non-abrasive sponge and/or cloth to avoid scratching and/or damaging the anodized surface.

During cleaning, the following aspects must be kept in mind at all times:

- Do not use acid or alkaline detergents because they could damage the aluminium;
- Do not use products and/or abrasive materials;
- Do not use organic solvents on painted surfaces;
- Do not use detergents without first checking their chemical composition;
- Do not apply detergents straight onto the surface to be cleaned;
- Surfaces must be "cold" (max T° = 30°C) during cleaning and not exposed to direct sunlight;
- Detergents used in cleaning must also be "cold" (max T° = 30°C) and steam sprays should not be used.

In any case, the final stage in the cleaning process is always sufficient rinsing of the parts treated with water. They must then be immediately dried using soft fabric or leather cloths. Polishes or similar products are not required.

Clean profiles carefully as soon as required, following the instructions on the product package, to prevent any residues of concrete, grout or similar substances from attacking the surface.

FIRE PREVENTION MEASURES

In the event of fire, use chemical fire extinguishers, dry sand or solid extinguishing agents.


NOTES

These profiles must be handled with caution, being careful to wear suitable gloves to prevent injury and/or cuts to the hands.


The instructions and specifications provided here are the product of our experience but are only a guide, should not be considered exhaustive and must be confirmed by extensive practical applications.

Profilpas declines any responsibility for damage to people or things resulting from improper use of the product.


Users must establish for themselves if the product is suitable for the required use and they bear full responsibility for any incorrect installation of the material.




CPQV



CPQV/I/E



CPQV/I/G

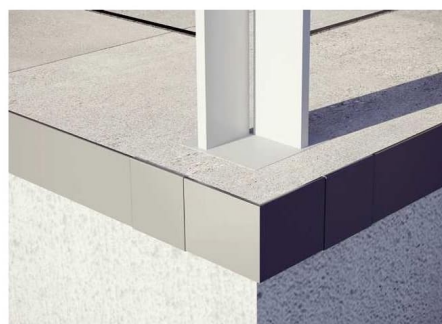

CPQV ash grey RAL 7038

PROTEC

length = 270 cm - pack 10 pcs

length = 270 cm - pack 10 pcs			H		
		10	12,5	10	12,5
ART.	finishing	CPQV/50/ (H1=50)		CPQV/70/ (H1=70)	
COLOUR-COATED ALUMINIUM					
ash grey RAL 7038		86960	86961	86962	86963
ash grey RAL 7038 embossed		86964	86965	86966	86967
metal grey RAL 9006		86968	86969	86970	86971
ancient grey		86972	86973	86974	86975
white ST		86976	86977	86978	86979

white RAL 9003, dark brown RAL 8019 and aluminium grey RAL 9007 with a minimum of 270 meters, on request, without surcharge. For colours on request please contact our sales department.

90° OUTSIDE CORNER

pack 5 pcs

pack 5 pcs			H		
		10	12,5	10	12,5
ART.	finishing	CPQV/50/ /E		CPQV/70/ /E	
COLOUR-COATED ALUMINIUM					
ash grey RAL 7038		86980	86981	86982	86983
ash grey RAL 7038 embossed		86984	86985	86986	86987
metal grey RAL 9006		86988	86989	86990	86991
ancient grey		86992	86993	86994	86995
white ST		86996	86997	86998	86999

JUNCTION

width = 70 mm - pack 5 pcs

width = 70 mm - pack 5 pcs			H
ART.	finishing	CPQV/50/G	CPQV/70/G
COLOUR-COATED ALUMINIUM			
ash grey RAL 7038		87000	87001
ash grey RAL 7038 embossed		87002	87003
metal grey RAL 9006		87004	87005
ancient grey		87006	87007
white ST		87008	87009

no partial packaging

LEGAL NOTICE

The contents of this Technical Data Sheet ("TDS") may be copied into another project-related document, but the resulting document shall not supplement nor replace requirements per the TDS in effect at the time of the MAPEI product installation. For the most up-to-date TDS and warranty information, please visit our website at www.mapei.com. **ANY ALTERATIONS TO THE WORDING OR REQUIREMENTS CONTAINED IN OR DERIVED FROM THIS TDS SHALL VOID ALL RELATED MAPEI WARRANTIES.**

Before using, the user must determine the suitability of our products for the intended use, and the user alone assumes all risks and liability. **ANY CLAIM SHALL BE DEEMED WAIVED UNLESS MADE IN WRITING TO US WITHIN FIFTEEN (15) DAYS FROM DATE IT WAS, OR REASONABLY SHOULD HAVE BEEN, DISCOVERED.**

CONTACT INFORMATION

MAPEI Headquarters of North America

1144 East Newport Center Drive
Deerfield Beach, Florida 33442
1-888-US-MAPEI (1-888-876-2734) / (954) 246-8888

Technical Services

U.S. and Puerto Rico:

Flooring: 1-800-992-6273

Concrete and heavy construction: 1-888-365-0614

Canada:

1-800-361-9309

Customer Service

1-800-42-MAPEI (1-800-426-2734)

Edition Date: November 30, 2023 MK 13295 (24-2083)

For the most current product data and BEST-BACKEDSM warranty information,
visit www.mapei.com.

All Rights Reserved. © 2023 MAPEI Corporation.

