


PVC LINE 8608- 8612-8613-8614

Skirting boards

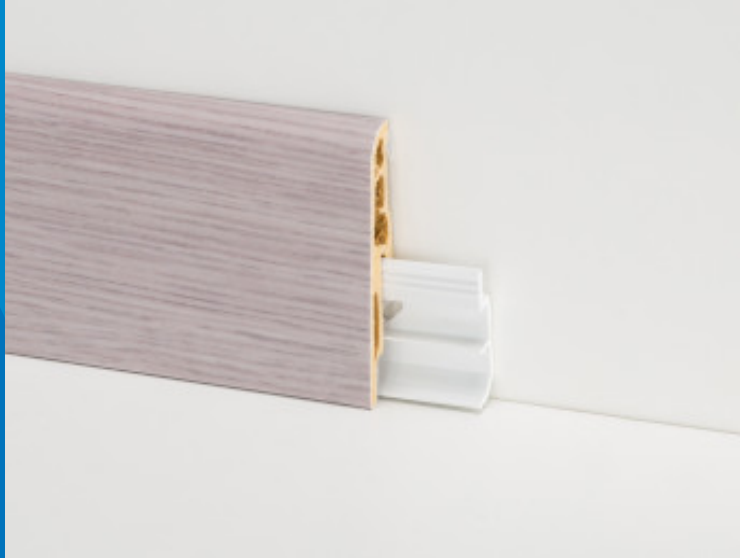

DESCRIPTION

PVC Line 8608, 8612, 8613 and 8614 are non-toxic, shockproof foam PVC skirting boards coated with a decorative, UV-resistant film.

Depending on the model, they can be fixed using suitable adhesives (such as PP/96) or snapped into place using the PVC clip that can be screwed to the wall.

PVC Line 8614 is ideal for renovation projects, to fit over any previous skirting boards.

PVC Line 8608, 8612, 8613 and 8614 do not contain formaldehyde (UNI EN 717-2 1996:1996), easily support humid environments (water absorption <1% UNI EN ISO 62:2008), withstands cold liquids (UNI EN 12720:2009).

MATERIALS

Foam PVC compound, lead-free, self-extinguishing. Stabilised, eco-compatible, based on Ca-Zn salts.

FIXING

Fixing with PP/96 type adhesive

Remove the skirting board from the packaging.

Where present, also remove any protection (protective and/or shrink-wrapped film) added to protect the finish. Measure the length required and cut the skirting board to this length using an appropriate tool.

Place the skirting board, cut to the right length, in position and fix it to the support with a suitable adhesive (such as PP/96), making sure that the support is free of dirt and perfectly clean.

Press and hold evenly along the length of the skirting board to make sure it bonds correctly to the surface.

Fixing using 8608/C clip for 8608 and 8613 only

Remove the skirting board from the packaging.

Where present, also remove any protection (protective and/or shrink-wrapped film) added to protect the finish. Measure the length required and cut the skirting board to this length using an appropriate tool.

Bring the PVC supports into the wall, making sure the base sticks to the floor. Using a permanent marker, mark the exact position in which to drill the holes (we recommend fixing supports to the wall every 40/50 cm). Remove the supports and drill the floor in the exact positions that you previously marked, being careful to check the exact size of the screws and plugs needed.

CARE AND MAINTENANCE

Care and maintenance procedures for the materials used to make these profiles depends largely on the type of alloy and/or finish used.

The instructions provided below describe the operations to be performed on the profile to restore it as much as possible to its original condition.

The purpose of this document is to provide as many general indications as possible to guide you on when and how to clean the product, but they should also be verified on a case-by-case basis.

It should be pointed out there are specific responsibilities in each part of the product's life cycle, starting from when it is installed the first time.

PVC- does not require special maintenance: it can be easily cleaned with colourless alcohol diluted in water or ordinary detergents.

FIRE PREVENTION MEASURES

In the event of fire, use chemical fire extinguishers, dry sand or solid extinguishing agents.

NOTES

These profiles must be handled with caution, being careful to wear suitable gloves to prevent injury and/or cuts to the hands.


The instructions and specifications provided here are the product of our experience but are only a guide, should not be considered exhaustive and must be confirmed by extensive practical applications.

Profilpas declines any responsibility for damage to people or things resulting from improper use of the product.

Users must establish for themselves if the product is suitable for the required used and they bear full responsibility for any incorrect installation of the material.



8608 foam PVC covered with Alcrom® Plus film + 8608/C



8608

PVC LINE

length = 250 cm - pack 20 pcs

FOAM PVC COVERED WITH ALCROM® PLUS FILM

H = 70 mm

ART.	decors		decors		decors	
8608		02 29040		32 29047		77 29061
		05 29075		34 29048		78 29062
		08 29041		35 29049		80 29063
		10 29043		36 29050		29064
		11 29044		39 29080		29081
		12 29045		40 29051		29082
		14 29076		41 29052		29066
		19 29077		44 29053		29069
		20 29046		29073		96 white RAL 9010 embossed 29070
		26 29078		65 29058		97 black RAL 9005 embossed 29071
		31 29079		29060		
8608		99 satin silver 29083				
		100 satin steel 29084				


no partial packaging

FIXING CLIPS FOR ART. 8608

pack of 100 pcs

8608/C


29751




8608/C



8613 foam PVC covered with Alcrom® Plus film - decor 96



8613



8608/C



8613 covered with Alcrom® Plus film - decor 100 satin steel

PVC LINE

length = 250 cm - pack 20 pcs

FOAM PVC COVERED WITH ALCROM® PLUS FILM

H = 80 mm

ART.	decors		decors	
	05	30060	580	30076
	08	30061	1202	30078
	12	30062	1203	30079
	13	30063	1204	30080
	14	30064	1205	30081
	19	30065	1206	30082
	26	30066	1207	30083
	31	30094	1208	30084
8613	32	30067	1209	30085
	36	30068	1210	30086
	39	30069	1211	30087
	40	30070	1212	30088
	41	30071	1213	30089
	77	30072	1214	30090
	89	30073	1215	30091
	91	30074	1216	30092
	93	30075	1217	30093
	96 white RAL 9010 embossed	29971		

8613	99 satin silver	29974
	100 satin steel	29975

no partial packaging

FIXING CLIPS FOR ART. 8613

pack of 100 pcs


8608/C

29751

no partial packaging



8612/10 foam PVC covered with Alcrom® Plus film - decor 96



8612/10

PVC LINE

length 250 cm - pack 20 pcs

FOAM PVC COVERED WITH ALCROM® PLUS FILM


H = 45 mm

ART.	decors		
	96 white RAL 9010 embossed		29970
8612/10	99 satin silver		29968
	100 satin steel		29967

no partial packaging



8614 foam PVC covered with Alcrom® Plus film - decor 96



8614

PVC LINE

length = 250 cm - pack 20 pcs

FOAM PVC COVERED WITH ALCROM® PLUS FILM

H = 90 mm

ART.	decors		
8614	96 white RAL 9010 embossed		29972

no partial packaging

LEGAL NOTICE

The contents of this Technical Data Sheet ("TDS") may be copied into another project-related document, but the resulting document shall not supplement nor replace requirements per the TDS in effect at the time of the MAPEI product installation. For the most up-to-date TDS and warranty information, please visit our website at www.mapei.com. **ANY ALTERATIONS TO THE WORDING OR REQUIREMENTS CONTAINED IN OR DERIVED FROM THIS TDS SHALL VOID ALL RELATED MAPEI WARRANTIES.**

Before using, the user must determine the suitability of our products for the intended use, and the user alone assumes all risks and liability. **ANY CLAIM SHALL BE DEEMED WAIVED UNLESS MADE IN WRITING TO US WITHIN FIFTEEN (15) DAYS FROM DATE IT WAS, OR REASONABLY SHOULD HAVE BEEN, DISCOVERED.**

CONTACT INFORMATION

MAPEI Headquarters of North America

1144 East Newport Center Drive
Deerfield Beach, Florida 33442
1-888-US-MAPEI (1-888-876-2734) / (954) 246-8888

Technical Services

U.S. and Puerto Rico:

Flooring: 1-800-992-6273

Concrete and heavy construction: 1-888-365-0614

Canada:

1-800-361-9309

Customer Service

1-800-42-MAPEI (1-800-426-2734)

Edition Date: November 30, 2023 MK 13283 / 13313 / 13314 / 13315 (24-1758)

For the most current product data and BEST-BACKEDSM warranty information,
visit www.mapei.com.

All Rights Reserved. © 2023 MAPEI Corporation.

