

**MAPEI®****UltraCare®**

Heavy-Duty Sealer & Coating Stripper

Sellador de alta resistencia y removedor de capas












- **Helps to remove tough coatings, lacquers, varnishes and sealers**

Ayuda a quitar revestimientos, lacas, barnices y selladores muy resistentes

- **Effectively dissolves heavy wax buildup**

Disuelve eficazmente cera pesada



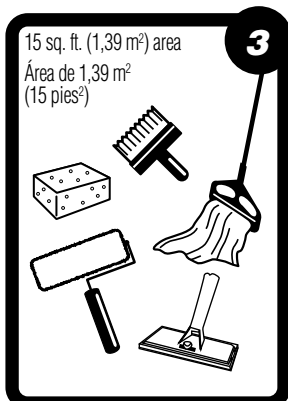



For the most current product data and BEST-BACKEDSM warranty information, visit www.mapei.com.

WHERE TO USE

- Most natural stones, grout, ceramic, porcelain, terra cotta, Saltillo, quarry tiles, cement terrazzo, concrete, pavers and masonry surfaces

LIMITATIONS

- Ensure that the product does not come in contact with any non-recommended surface.
- Do not mix with other chemicals.
- Will affect sealers, coatings, floor finishes and painted surfaces

INSTRUCTIONS

Always test first in several inconspicuous areas to confirm desired results.

Close container tightly after each use. Store in original container only. Store between the temperatures of 35°F to 90°F (2°C to 32°C). Do not allow to freeze.

For complete instructions, consult the Technical Data Sheet or MAPEI's Technical Services Department.

APPROXIMATE COVERAGE

1 U.S. qt. (946 mL)	15 – 50 sq. ft. (1,39 – 4,65 m²)
----------------------------	--

1 U.S. gal. (3,79 L)	60 – 200 sq. ft. (5,57 – 18,6 m²)
-----------------------------	---

Coverage will vary depending on density, porosity, texture, surface absorption, time that the solution is left on the surface, application method, severity of the problem and dilution used.



Para los datos del producto más actuales y la información de la garantía BEST-BACKEDSM, visite www.mapei.com.

DONDE USARLO

- En la mayoría de piedras naturales, lechada, losetas de cerámica, porcelana, terracota, saltillo, losetas de cantera, terrazzo, concreto, adoquines y superficies de mampostería

LIMITACIONES

- Asegúrese de que el producto no entre en contacto con ninguna superficie no recomendada.
- No mezcle con otros productos químicos.
- Este producto afectará a los selladores, revestimientos, acabados para piso y superficies pintadas.

INSTRUCCIONES

Siempre pruebe en varias zonas poco notorias para confirmar los resultados deseados.

Cierre bien el envase después de cada uso. Almacene en el envase original solamente. Almacene a una temperatura de entre 2°C y 32°C (35°F y 90°F). No permita que se congele.

Consulte la Ficha técnica o al Departamento de Servicio Técnico de MAPEI para obtener instrucciones completas.

COBERTURA APROXIMADA

946 mL (1 cuarto de galón de EE.UU.)	1,39 – 4,65 m² (15 – 50 pies²)
---	---

3,79 L (1 galón de EE.UU.)	5,57 – 18,6 m² (60 – 200 pies²)
-----------------------------------	--

La cobertura variará dependiendo de la densidad, porosidad, textura, absorción de la superficie, el tiempo se deje la solución sobre la superficie, el método de aplicación, la gravedad del problema y la disolución utilizada.