

CRYLAFLOR™ GARD SL


Crylaflor Gard SL is a 100% reactive, fast curing, high strength, methyl methacrylate (MMA)-based, acrylic flooring system. A 1/8-1/4 inch (3-6 mm) overlay system is composed of primer, self-leveling body coat and topcoat(s). Surface finish is typically smooth.

BENEFITS

- Stain resistant — Reduces discoloration caused by common chemicals and cleaners
- Variable build — Achieves self-level up to 250 mil
- Abrasion resistant — Performance topcoat delivers superior toughness
- Easy maintenance — Long-lasting performance

USES

- Manufacturing areas
- Traffic aisles
- Assembly areas
- Heavy industry
- Walk-in coolers/freezers

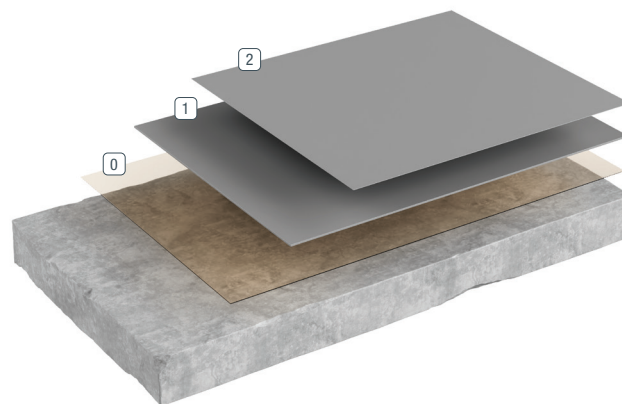

0 Primer

2 Seal Coat

1 Base Coat



FEATURED COLORS



White



Beige



Light Grey



Medium Grey



Slate Grey



Concrete Grey



Charcoal



Smoke Blue



Green



Tile Red

Envision a color in your space using our Flooring Visualizer Tool at floorvisualizer.sherwin-williams.com. This reproduction approximates the actual color. Factors such as the type of product, degree of gloss, texture, size and shape of area, lighting, heat or method of application may cause color variance. Contact your Sherwin-Williams representative for details.

ABOUT CHEMICAL RESISTANCE

Sherwin-Williams High Performance Flooring offers a broad range of systems to accommodate nearly every industrial, commercial and institutional setting. Each flooring system includes a standard chemical-resistant topcoat or surface proven to perform under typical conditions.

Important considerations:

- The combination of cleaning solutions, sanitizing chemicals, processing substances and products found in any operational setting is unique.
- Knowing exactly which materials are present — as well as their concentrations and typical exposure times before cleanup — is critical for proper flooring system selection.
- During the specification process, a flooring system's standard chemical-resistant topcoat may get replaced with one better suited to unique facility conditions.

The ability of a flooring system to perform as designed relies heavily on proper selection. Matching each use case with the right chemical-resistant flooring is key to having a facility looking great and functioning at peak level over the long term.

See our Chemical Resistance Guide and other technical resources on our website. Connect with a Sherwin-Williams High Performance Flooring expert for help with specifying an optimal flooring system for your facility.

TYPICAL PHYSICAL PROPERTIES

Percent Reactive	100%
VOC	< 100 g/L
Pot Life @ 68°F (20°C)	10-20 minutes
Cure Rate @ 68°F (20°C)	40-60 minutes
Recoat Time	40-60 minutes
Tensile Strength	2,175 psi (15 N/mm ²)
Compressive Strength	6,000-8,000 psi (Filled System) (41-56 N/mm ²)

THE SHERWIN-WILLIAMS DIFFERENCE

Sherwin-Williams High Performance Flooring delivers world-class industry subject matter expertise, unparalleled technical and specification service, and unmatched regional commercial team support to our customers around the globe.

United States & Canada

sherwin-williams.com/resin-flooring
swflooding@sherwin.com