

CEMLACK TERRAZZO


Cemlack Terrazzo is a specially formulated combination of acrylic polymer and modifiers used with cement and inert aggregates with marble chips in a troweled mortar system. Cemlack Terrazzo is applied at 3/8" and then ground and polished to reveal the natural beauty of the aggregates for a decorative hard surface for interior or exterior use.

BENEFITS

- Aesthetically pleasing appearance
- Short installation time
- Durable and wear resistant
- Chemical and stain resistant
- Meets and/or exceeds all NTMA and TTMAC standards
- Designed for easy-to-clean and smooth surfaces

USES


- Commercial, retail and institutional facilities
- Healthcare, research and pharmaceuticals
- Exterior promenades and decks

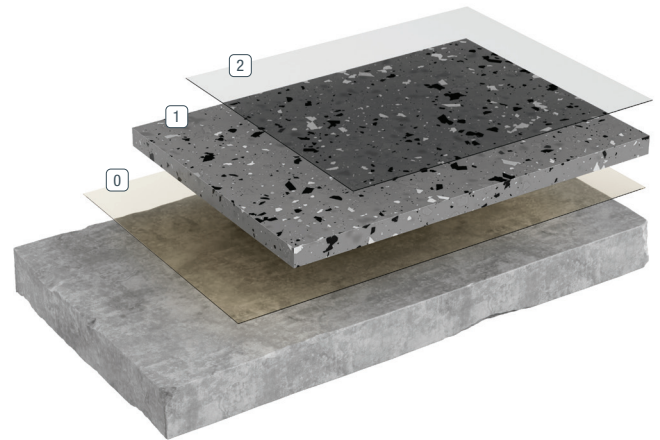

0 Primer

2 Seal Coat

1 Mortar/Grout

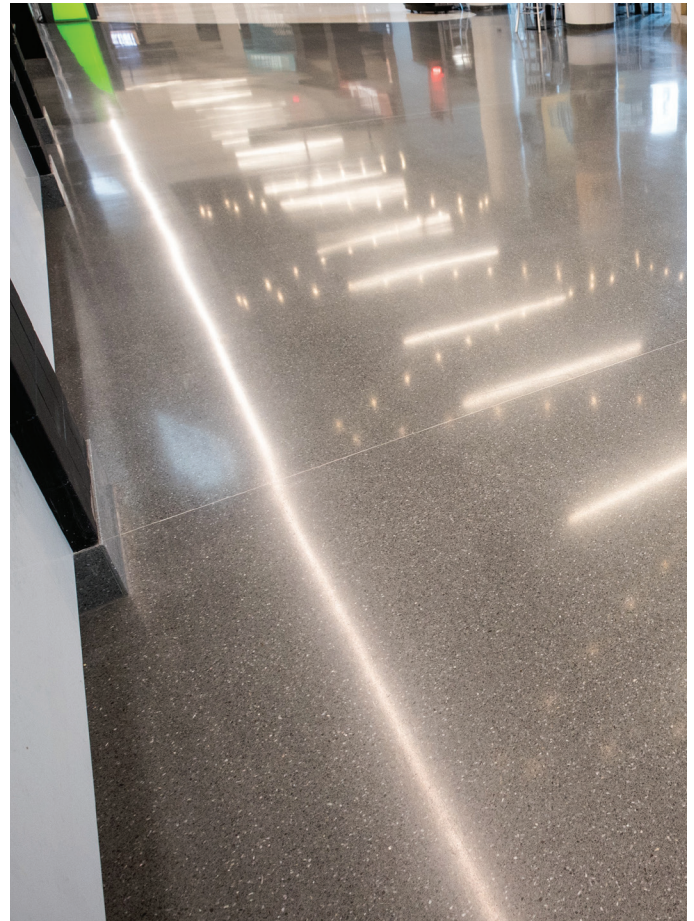

ABOUT CHEMICAL RESISTANCE

Sherwin-Williams High Performance Flooring offers a broad range of systems to accommodate nearly every industrial, commercial and institutional setting. Each flooring system includes a standard chemical-resistant topcoat or surface proven to perform under typical conditions.

Important considerations:

- The combination of cleaning solutions, sanitizing chemicals, processing substances and products found in any operational setting is unique.
- Knowing exactly which materials are present — as well as their concentrations and typical exposure times before cleanup — is critical for proper flooring system selection.
- During the specification process, a flooring system's standard chemical-resistant topcoat may get replaced with one better suited to unique facility conditions.

The ability of a flooring system to perform as designed relies heavily on proper selection. Matching each use case with the right chemical-resistant flooring is key to having a facility looking great and functioning at peak level over the long term.

See our Chemical Resistance Guide and other technical resources on our website. Connect with a Sherwin-Williams High Performance Flooring expert for help with specifying an optimal flooring system for your facility.

TYPICAL PHYSICAL PROPERTIES

Compressive Strength, ASTM C579	4,600 psi
Tensile Strength, ASTM C 190	1,000 psi
Abrasion Resistance - MIL-D-3134 F, Sec. 4.7.8.	0.150 inch lost
Flexural Strength, ASTM C 293	2,500 psi
Bond Strength, ASTM C 190	300 psi
Flammability	Self-extinguishing over concrete No slip or flow at required temperature of 158°F
Resistance to Elevated Temperatures- MIL-D-3134J	ASTM C = Mortar ASTM D = Resin Only

THE SHERWIN-WILLIAMS DIFFERENCE

Sherwin-Williams High Performance Flooring delivers world-class industry subject matter expertise, unparalleled technical and specification service, and unmatched regional commercial team support to our customers around the globe.

United States & Canada

sherwin-williams.com/resin-flooring
swflooring@sherwin.com