

RESUFLOTM AQUA DECO FLAKE SB


Resufloor Aqua Deco Flake SB System is a mosaic pattern floor covering. These vinyl chips are incorporated in a water-based epoxy and sealed with a clear coat of an abrasion-resistant, water-based polyurethane that is available in a high-gloss or satin finish. Its innovative base chemistry also provides tough chemical-resistant protection.

BENEFITS

- Aesthetically pleasing appearance
- Limitless color options
- Breathable
- Can be applied to green concrete after 7 days
- Seamless
- Chemical- and stain-resistant
- High-gloss or satin finish

USES

- Nursing homes and healthcare facilities
- Clean rooms and pharmaceuticals
- Office buildings
- Locker and restrooms
- Basements
- Garages

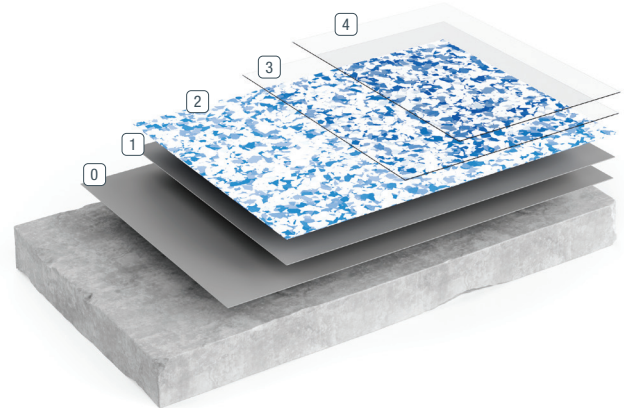

0 Primer

1 Base


2 Broadcast

3 Grout


4 Seal Coat




FEATURED COLORS



Flaxseed




Ocelot




Almond Milk




Agave




Meteorite




Husky Gray




Chinchilla




Limestone



Mackerel



Black Bean



Burnt Wood



Moon

Unlimited standard and custom blends available. Please see ResufloTM Aqua Deco SB Flake Color Cards for the extensive collection of standard blends or use our Flooring Visualizer Tool to create your own custom blend at floorvisualizer.sherwin-williams.com. This reproduction approximates the actual color. Factors such as the type of product, degree of gloss, texture, size and shape of area, lighting, heat or method of application may cause color variance. Contact your Sherwin-Williams representative for details.

ABOUT CHEMICAL RESISTANCE

Sherwin-Williams High Performance Flooring offers a broad range of systems to accommodate nearly every industrial, commercial and institutional setting. Each flooring system includes a standard chemical-resistant topcoat or surface proven to perform under typical conditions.

Important considerations:

- The combination of cleaning solutions, sanitizing chemicals, processing substances and products found in any operational setting is unique.
- Knowing exactly which materials are present – as well as their concentrations and typical exposure times before cleanup – is critical for proper flooring system selection.
- During the specification process, a flooring system's standard chemical-resistant topcoat may get replaced with one better suited to unique facility conditions.

The ability of a flooring system to perform as designed relies heavily on proper selection. Matching each use case with the right chemical-resistant flooring is key to a having a facility looking great and functioning at peak level over the long term.

See our Chemical Resistance Guide and other technical resources on our website. Connect with a Sherwin-Williams High Performance Flooring expert for help with specifying an optimal flooring system for your facility.

TYPICAL PHYSICAL PROPERTIES

Color	Custom color blends
Abrasion Resistance ASTM D 4060, CS-17 Wheel, 1,000	64 mgs lost
Flexural Strength ASTM C 580	10,000 psi
Adhesion ACI 503R	300 psi concrete failure
Flammability ASTM C 579	Self-Extinguishing over concrete
Impact Resistance MIL-D-3134J	Direct, inch pound greater than 160, passes Reverse, inch pound greater than 80, passes
Resistance to Elevated Temperatures MIL-D-3134J	No slip or flow at required temperature of 158°F

ASTM C = Mortar System
ASTM D = Resin only

THE SHERWIN-WILLIAMS DIFFERENCE

Sherwin-Williams High Performance Flooring delivers world-class industry subject matter expertise, unparalleled technical and specification service, and unmatched regional commercial team support to our customers around the globe.

United States & Canada

sherwin-williams.com/resin-flooring
swflooring@sherwin.com