

RESUFLOTM AQUA TOPCOAT AC


Resufloor Aqua Topcoat AC is designed to provide a thin-mil, light-reflective and chemical-resistant finish.

BENEFITS

- Excellent gloss retention
- UV color stability
- Chemical and stain resistant
- Resists common acids, fuels, grease, salt and SkydrolTM
- CDPH
- LEED[®]
- No testing for moisture necessary
- All systems breathe
- Rapidly installed
- Seamless
- Can be applied to “green” concrete
- Water cleanup
- Acceptable for use in USDA-inspected facilities

USES

- Aircraft hangars
- Warehouses
- Industrial plants

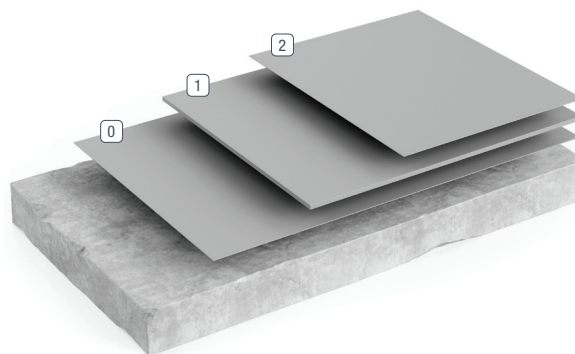


0 Primer

2 Topcoat

1 Base Coat



FEATURED COLORS

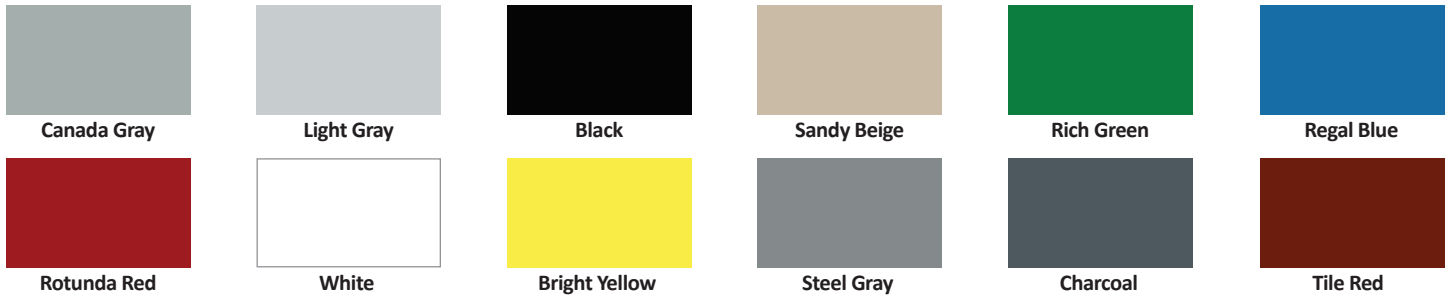

Standard and custom colors available. Please see the Resuflo Standard Industrial Color Card for details or envision a color in your space using our Flooring Visualizer Tool at floorvisualizer.sherwin-williams.com. This reproduction approximates the actual color. Factors such as the type of product, degree of gloss, texture, size and shape of area, lighting, heat or method of application may cause color variance. Contact your Sherwin-Williams representative for details.

ABOUT CHEMICAL RESISTANCE

Sherwin-Williams High Performance Flooring offers a broad range of systems to accommodate nearly every industrial, commercial and institutional setting. Each flooring system includes a standard chemical-resistant topcoat or surface proven to perform under typical conditions.

Important considerations:

- The combination of cleaning solutions, sanitizing chemicals, processing substances and products found in any operational setting is unique.
- Knowing exactly which materials are present — as well as their concentrations and typical exposure times before cleanup — is critical for proper flooring system selection.
- During the specification process, a flooring system's standard chemical-resistant topcoat may get replaced with one better suited to unique facility conditions.

The ability of a flooring system to perform as designed relies heavily on proper selection. Matching each use case with the right chemical-resistant flooring is key to having a facility looking great and functioning at peak level over the long term.

See our Chemical Resistance Guide and other technical resources on our website. Connect with a Sherwin-Williams High Performance Flooring expert for help with specifying an optimal flooring system for your facility.

TYPICAL PHYSICAL PROPERTIES

Abrasion Resistance, ASTM D 4060, CS-17 Wheel, 1,000 cycles	30-50 mgs lost
Abrasion Resistance, ASTM D 4060, CS-17 Wheel, 1,000 cycles	No slip or flow at required temperature of 158°F
Adhesion, ACI 503R	300 psi concrete failure
Flammability	Self-extinguishing over concrete
Gloss 60° Gloss Meter @ 73°F, 50% RH	90
Impact Resistance, MIL-D-3134J	Direct, inch pound greater than 160 passes Reverse, inch pound greater than 160 passes

THE SHERWIN-WILLIAMS DIFFERENCE

Sherwin-Williams High Performance Flooring delivers world-class industry subject matter expertise, unparalleled technical and specification service, and unmatched regional commercial team support to our customers around the globe.

United States & Canada

sherwin-williams.com/resin-flooring
swflooring@sherwin.com