

RESUFLOTM AQUA TOPCOAT TX


Resufloor Aqua Topcoat TX combines a unique aliphatic polyurethane resin and a durable powdered aggregate to provide an abrasion-resistant seal coat that extends the life expectancy of a standard urethane topcoat. Resufloor Aqua Topcoat TX is specially formulated to resist wear patterns in high traffic areas while maintaining chemical and color (UV) stability.

BENEFITS

- UV stable
- High solids
- Acceptable for use in USDA-inspected facilities
- Abrasion resistant
- High gloss
- Resistant to Betadine staining
- Breathable
- No moisture testing necessary
- LEED®

USES


- Healthcare facilities
- Animal holding
- Laboratories
- Cleanrooms
- Restrooms
- Change rooms
- Corridors
- Production floors

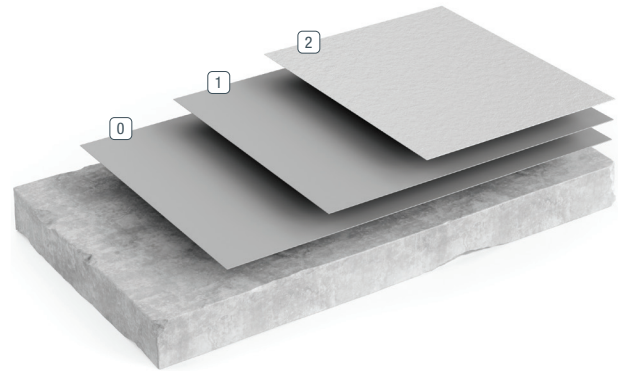


0 Primer

2 Topcoat

1 Body Coat

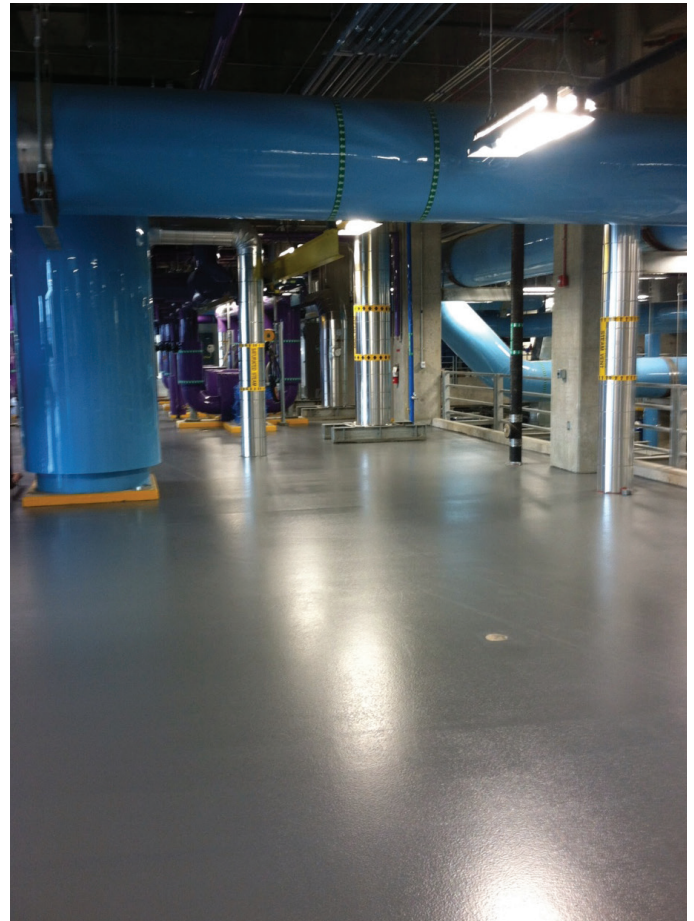

FEATURED COLORS

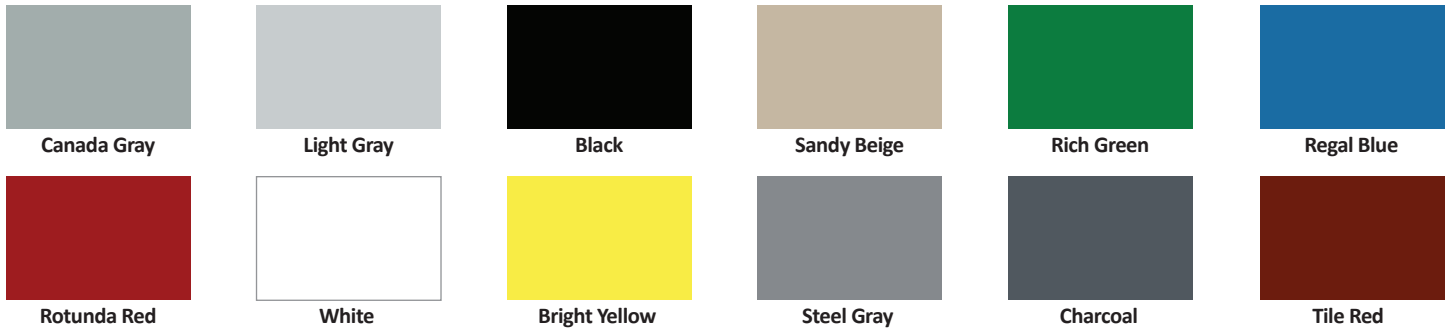

Standard and custom colors available. Please see the Resuflo Standard Industrial Color Card for details or envision a color in your space using our Flooring Visualizer Tool at floorvisualizer.sherwin-williams.com. This reproduction approximates the actual color. Factors such as the type of product, degree of gloss, texture, size and shape of area, lighting, heat or method of application may cause color variance. Contact your Sherwin-Williams representative for details.

ABOUT CHEMICAL RESISTANCE

Sherwin-Williams High Performance Flooring offers a broad range of systems to accommodate nearly every industrial, commercial and institutional setting. Each flooring system includes a standard chemical-resistant topcoat or surface proven to perform under typical conditions.

Important considerations:

- The combination of cleaning solutions, sanitizing chemicals, processing substances and products found in any operational setting is unique.
- Knowing exactly which materials are present — as well as their concentrations and typical exposure times before cleanup — is critical for proper flooring system selection.
- During the specification process, a flooring system's standard chemical-resistant topcoat may get replaced with one better suited to unique facility conditions.

The ability of a flooring system to perform as designed relies heavily on proper selection. Matching each use case with the right chemical-resistant flooring is key to having a facility looking great and functioning at peak level over the long term.

See our Chemical Resistance Guide and other technical resources on our website. Connect with a Sherwin-Williams High Performance Flooring expert for help with specifying an optimal flooring system for your facility.

TYPICAL PHYSICAL PROPERTIES

Solids, by weight	94%
Cure: Dry to Touch Recoat	12 hours
Foot Traffic	15 hours
Wheeled Traffic Full Cure	18-24 hours 2 days minimum
Abrasion Resistance, ASTM D 4060, CS-17 Wheel, 1,000 cycles	30 mgs
Adhesion ACI 503R	350 psi 100% concrete failure
Elongation, ASTM D 638	25.4%
Tensile Strength, ASTM D 638	3,217 psi

THE SHERWIN-WILLIAMS DIFFERENCE

Sherwin-Williams High Performance Flooring delivers world-class industry subject matter expertise, unparalleled technical and specification service, and unmatched regional commercial team support to our customers around the globe.

United States & Canada

sherwin-williams.com/resin-flooring
swflooding@sherwin.com