

RESUFLOTM COVE-REZ


Resufloor Cove-Rez is an epoxy system designed to be used as an integral part of the flooring system. The vertical portion can be installed to any height at 1/16" to 1/4" thickness.

BENEFITS


- Seamless

USES

- Commercial kitchen coolers and walk-in boxes
- Packing and storage areas
- Pharmaceuticals
- Chemical production
- Laboratories
- Food and beverage facilities
- Showers and bathrooms

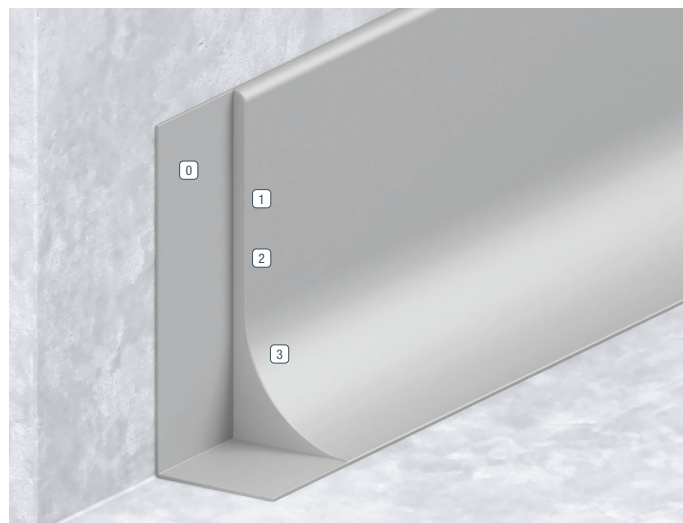

- 0 Wall
- 1 Primer/Epoxy Cove Mortar
- 2 Grout/Seal Coat
- 3 4" to 6" High Resinous Flooring Cove Base with 3/4" or 1" Radius Cove

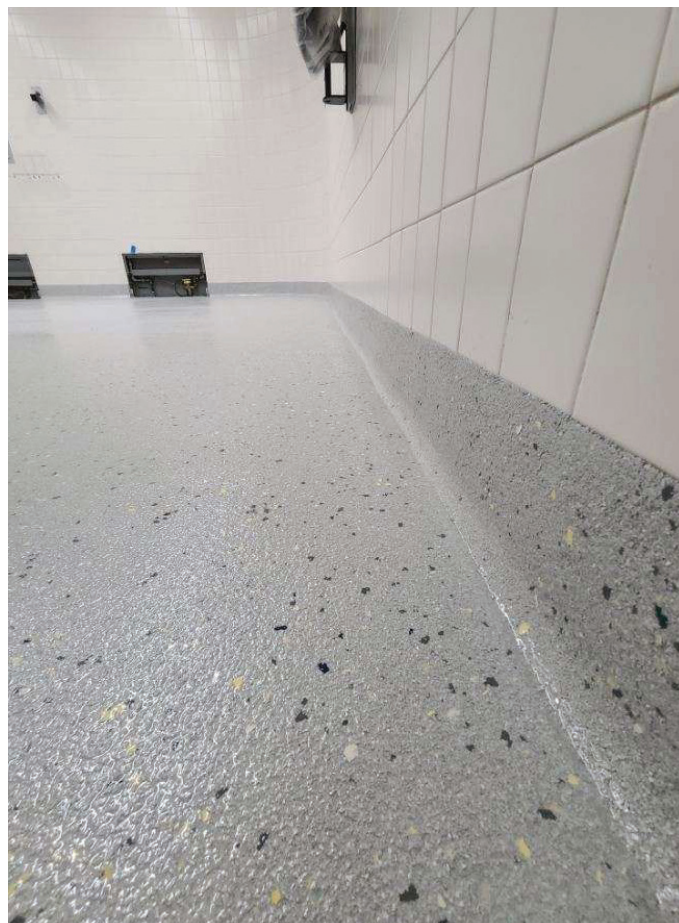

ABOUT CHEMICAL RESISTANCE

Sherwin-Williams High Performance Flooring offers a broad range of systems to accommodate nearly every industrial, commercial and institutional setting. Each flooring system includes a standard chemical-resistant topcoat or surface proven to perform under typical conditions.

Important considerations:

- The combination of cleaning solutions, sanitizing chemicals, processing substances and products found in any operational setting is unique.
- Knowing exactly which materials are present — as well as their concentrations and typical exposure times before cleanup — is critical for proper flooring system selection.
- During the specification process, a flooring system's standard chemical-resistant topcoat may get replaced with one better suited to unique facility conditions.

The ability of a flooring system to perform as designed relies heavily on proper selection. Matching each use case with the right chemical-resistant flooring is key to having a facility looking great and functioning at peak level over the long term.

See our Chemical Resistance Guide and other technical resources on our website. Connect with a Sherwin-Williams High Performance Flooring expert for help with specifying an optimal flooring system for your facility.

TYPICAL PHYSICAL PROPERTIES

Color	Standard floor colors; computerized custom color matching available upon request
Hardness (Shore D) ASTM D-2240	75-80
Water Absorption ASTM D-570	0.04%
Flammability ASTM D-635	Self-extinguishing
Flame Spread/NFPA-101 ASTM E-84	Class A
Tensile Strength ASTM D-638	12-13,000 psi
Flexural Strength ASTM D-790	18-19,000 psi
Compressive Strength ASTM D-695	17.5-19,000 psi
Izod Impact (ft. lb./in. notch) ASTM D-256	0.50
Bond Strength to Concrete ACI-403	Concrete fails before loss of bond
Elevated Temperature MIL D-3134	No slip or flow
Salt Spray Resistance, 25% solution at 90°F	No effect after 100 hours
Thermal Shock, 50 cycles of immersion in chilled & boiling water MIL F-52505	No cracking or loss of adhesion
Abrasion Resistance, CS-10 Wheel, Wgt. Loss, 1000 gr. Load, 1000 cycles	30 mg

THE SHERWIN-WILLIAMS DIFFERENCE

Sherwin-Williams High Performance Flooring delivers world-class industry subject matter expertise, unparalleled technical and specification service, and unmatched regional commercial team support to our customers around the globe.

United States & Canada

sherwin-williams.com/resin-flooring
swflooring@sherwin.com