

RESUFLOTM DECO FLAKE DQF


Resuflo Deco Flake DQF System is a high-strength floor covering with a unique mosaic appearance, created with the use of two different types of decorative broadcast media and high-performance epoxy coatings. The first broadcast is an application of decorative quartz, while the second broadcast utilizes decorative flake. The flake and quartz aggregates are available in a variety of standard and custom colors/blends to complement virtually any facility décor.

BENEFITS

- Aesthetically pleasing appearance
- Limitless color options
- Seamless and sanitary
- Chemical- and stain-resistant
- High-gloss finish
- Contributes to LEED® v4 credits

USES

- Nursing homes and healthcare facilities
- Cleanrooms and pharmaceutical facilities
- Retail and office buildings
- Locker rooms and restrooms
- Schools and universities
- Stadiums and hospitality venues

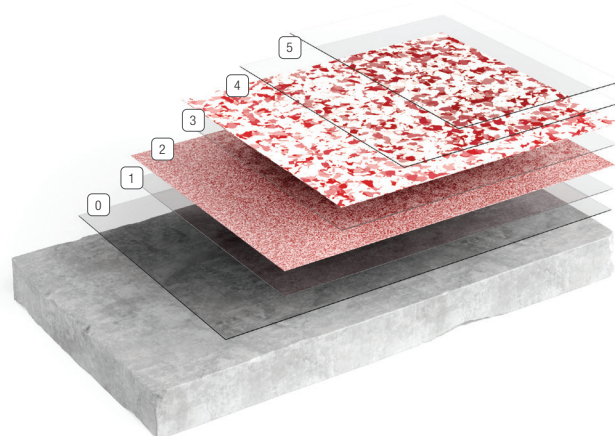

- | | |
|----------------------------------|---------------------------------|
| 0 Primer | 3 2nd Base Coat |
| 1 1st Base Coat | 4 2nd Broadcast - Colored Flake |
| 2 1st Broadcast - Colored Quartz | 5 Grout and Topcoat |



FEATURED COLORS



Flaxseed




Ocelot




Almond Milk



Agave




Meteorite




Husky Gray




Chinchilla



Limestone



Mackerel



Black Bean



Burnt Wood



Moon

Unlimited standard and custom blends available. Please see ResufloTM Deco Flake DQF Color Cards for the extensive collection of standard blends or use our Flooring Visualizer Tool to create your own custom blend at floorvisualizer.sherwin-williams.com. This reproduction approximates the actual color. Factors such as the type of product, degree of gloss, texture, size and shape of area, lighting, heat or method of application may cause color variance. Contact your Sherwin-Williams representative for details.

ABOUT CHEMICAL RESISTANCE

Sherwin-Williams High Performance Flooring offers a broad range of systems to accommodate nearly every industrial, commercial and institutional setting. Each flooring system includes a standard chemical-resistant topcoat or surface proven to perform under typical conditions.

Important considerations:

- The combination of cleaning solutions, sanitizing chemicals, processing substances and products found in any operational setting is unique.
- Knowing exactly which materials are present – as well as their concentrations and typical exposure times before cleanup – is critical for proper flooring system selection.
- During the specification process, a flooring system's standard chemical-resistant topcoat may get replaced with one better suited to unique facility conditions.

The ability of a flooring system to perform as designed relies heavily on proper selection. Matching each use case with the right chemical-resistant flooring is key to a having a facility looking great and functioning at peak level over the long term.

See our Chemical Resistance Guide and other technical resources on our website. Connect with a Sherwin-Williams High Performance Flooring expert for help with specifying an optimal flooring system for your facility.

TYPICAL PHYSICAL PROPERTIES

Color	Standard and custom color blends available
Abrasion Resistance ASTM D 4060, CS-17 Wheel, 1,000 cycles	80-90
Compressive Strength ASTM D695	13,500 psi
Adhesion ASTM D4541	450 psi concrete failure
Adhesion ASTM D7234	732 psi concrete failure
Shore D Hardness ASTM D2240	80-85 @ 0 sec 75-80 @ 15 sec
Tensile Strength ASTM D2370	8,000 psi
Percent Elongation (topcoat resin) ASTM D2370	5%
Flammability ASTM D635	Self-extinguishing over concrete 182 mm/min

THE SHERWIN-WILLIAMS DIFFERENCE

Sherwin-Williams High Performance Flooring delivers world-class industry subject matter expertise, unparalleled technical and specification service, and unmatched regional commercial team support to our customers around the globe.

United States & Canada

sherwin-williams.com/resin-flooring
swflooring@sherwin.com