

RESUFLOTM DECO QUARTZ SD FLOORING SYSTEM


Resuflo Deco Quartz SD combines the aesthetics and wear of quartz flooring with electrostatic protection for sensitive electronic components.

BENEFITS

- Aesthetically pleasing appearance
- Wide color selection
- Wear- and slip-resistant
- Complies with ANSI/ESD S20.20 ohms resistance
- Urethane or epoxy finish

USES


- Electronics manufacturing and assembly
- Cleanrooms
- Laboratories
- Computer rooms

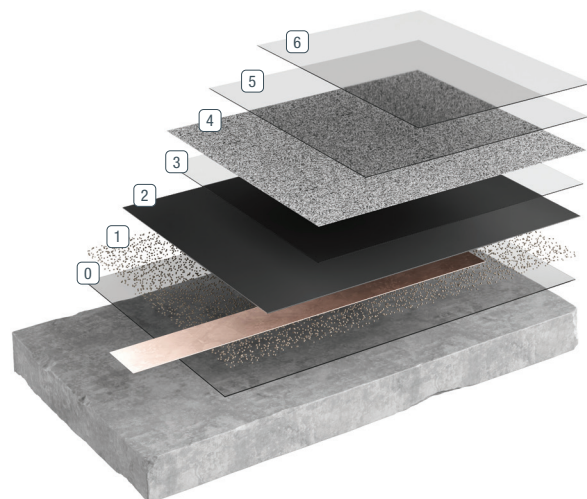


- | | |
|---------------------|--------------------------|
| 0 Primer | 4 Color Quartz Broadcast |
| 1 Broadcast | 5 Grout Coat |
| 2 Conductive Primer | 6 Seal Coat |
| 3 ESD Base Coat | |




FEATURED COLORS



Blue Slate



Night Sky



New Granite




Brisket



Brindle




Americano




Lagoon



Autumn Spice




Seascape



Redwood



Mud Pie



Grassland

Unlimited standard and custom blends available. Please see Deco Quartz Color Cards for the extensive collection of standard blends or use our Flooring Visualizer Tool to create your own custom blend at floorvisualizer.sherwin-williams.com. This reproduction approximates the actual color. Factors such as the type of product, degree of gloss, texture, size and shape of area, lighting, heat or method of application may cause color variance. Contact your Sherwin-Williams representative for details.

ABOUT CHEMICAL RESISTANCE

Sherwin-Williams High Performance Flooring offers a broad range of systems to accommodate nearly every industrial, commercial and institutional setting. Each flooring system includes a standard chemical resistant topcoat or surface proven to perform under typical conditions.

Important considerations:

- The combination of cleaning solutions, sanitizing chemicals, processing substances and products found in any operational setting is unique.
- Knowing exactly which materials are present – as well as their concentrations and typical exposure times before cleanup – is critical for proper flooring system selection.
- During the specification process, a flooring system's standard chemical resistant topcoat may get replaced with one better suited to unique facility conditions.

The ability of a flooring system to perform as designed relies heavily on proper selection. Matching each use case with the right chemical resistant flooring is key to a having a facility looking great and functioning at peak level over the long term.

See our Chemical Resistance Guide and other technical resources on our website. Connect with a Sherwin-Williams High Performance Flooring expert for help with specifying an optimal flooring system for your facility.

TYPICAL PHYSICAL PROPERTIES

Property	Result
Abrasion Resistance	Resutile [™] SDS topcoat 38 mg lost 3564 topcoat 70 mg lost
Adhesion ACI 503R	Concrete failure
Compressive Strength ASTM C 579	8,500 psi
Conductivity Resistance ANSI/ESD-S7.1	<10 ⁹ ohms
Adhesion ACI 503R	350 psi 100% concrete failure
Static Charge Decay Dissipates a 5,000-volt MIL-B-81705B charge to zero in less than 0.1 seconds	4,500 psi
Koenig Hardness, 3 mil film ASTM D4366	171.3
Flammability	Self-extinguishing over concrete
Tensile Strength ASTM C 307	2,500 psi

THE SHERWIN-WILLIAMS DIFFERENCE

Sherwin-Williams High Performance Flooring delivers world-class industry subject matter expertise, unparalleled technical and specification service, and unmatched regional commercial team support to our customers around the globe.

United States & Canada

sherwin-williams.com/resin-flooring
swflooding@sherwin.com