

RESUFLO DEC QUARTZ


Resuflo Deco Quartz is a seamless, decorative flooring system consisting of 100% solids epoxy body coats with decorative colored quartz broadcasts, finished with a durable urethane topcoat ensuring excellent wear and chemical resistance.

BENEFITS


- Long lasting — Seamless flooring systems for years of service with minimal maintenance
- Wear/chemical resistant — High-quality urethane topcoat for superior wear and chemical resistance
- Decorative — Multiple blends of pigmented quartz aggregate for a unique look
- Non-slip — Textured finishes aid in a safer floor, even when wet

USES


- Hospitals
- Cleanrooms
- Laboratories
- Pharmaceutical
- Lobbies
- Restrooms
- Locker rooms
- Retail
- Schools
- Supermarkets
- Cafeterias
- Dining areas

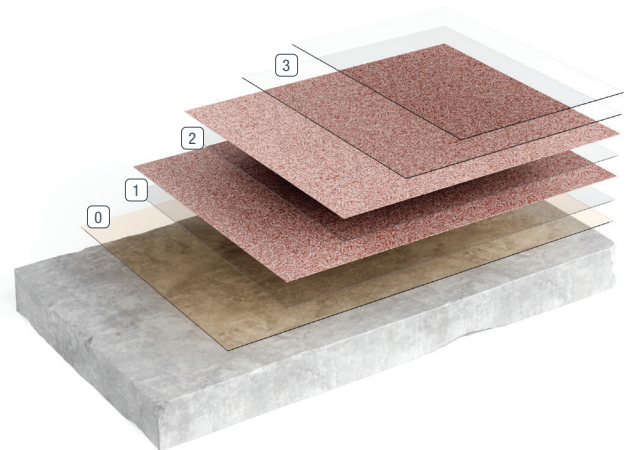


- | | |
|-----------------------|--------------------|
| 0 Primer | 2 Second Broadcast |
| 1 Base Coat/Broadcast | 3 Grout/Seal Coat |

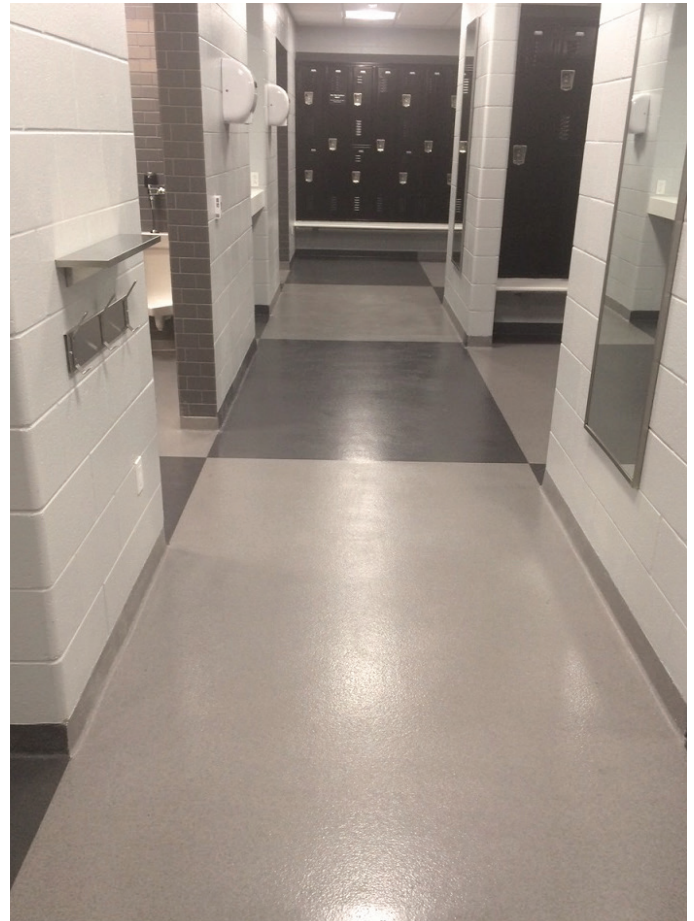


FEATURED COLORS



Blue Slate



Night Sky



New Granite




Brisket




Brindle




Americano




Lagoon




Autumn Spice




Seascape



Redwood



Mud Pie



Grassland

Unlimited standard and custom blends available. Please see Deco Quartz Color Cards for the extensive collection of standard blends or use our Flooring Visualizer Tool to create your own custom blend at floorvisualizer.sherwin-williams.com. This reproduction approximates the actual color. Factors such as the type of product, degree of gloss, texture, size and shape of the area, lighting, heat or method of application may cause color variance. Contact your Sherwin-Williams representative for details.

ABOUT CHEMICAL RESISTANCE

Sherwin-Williams High Performance Flooring offers a broad range of systems to accommodate nearly every industrial, commercial and institutional setting. Each flooring system includes a standard chemical-resistant topcoat or surface proven to perform under typical conditions.

Important considerations:

- The combination of cleaning solutions, sanitizing chemicals, processing substances and products found in any operational setting is unique.
- Knowing exactly which materials are present — as well as their concentrations and typical exposure times before cleanup — is critical for proper flooring system selection.
- During the specification process, a flooring system's standard chemical-resistant topcoat may get replaced with one better suited to unique facility conditions.

The ability of a flooring system to perform as designed relies heavily on proper selection. Matching each use case with the right chemical-resistant flooring is key to having a facility looking great and functioning at peak level over the long term.

See our Chemical Resistance Guide and other technical resources on our website. Connect with a Sherwin-Williams High Performance Flooring expert for help with specifying an optimal flooring system for your facility.

TYPICAL PHYSICAL PROPERTIES

Hardness, Shore D, ASTM D-2240	75-80
Compressive Strength, ASTM D-695	17,500 psi
Compressive Strength, ASTM C-579	12,500 psi
Tensile Strength, ASTM D-638	4,000 psi
Tensile Strength, ASTM C-307	6,600 psi
Tensile Elongation, ASTM D-638	7.50%
Flexural Strength, ASTM D-790	6,259 psi
Flexural Strength, ASTM C-580	4,500 psi
Flexural Modulus of Elasticity, ASTM D-790	6.2 x 10 ⁵
Coefficient of Linear Expansion, ASTM D-696	2 x 10 ⁻⁵
Bond Strength to Concrete, ASTM D-4541	400 psi substrate fails
Indentation, ML D-3134	.025 MAX
Impact Resistance, ML D-3134	> 160 in-lb
Water Absorption, ASTM D-570	0.04%
Heat Resistance Limitation	140°F-200°F
Flammability, ASTM D-635	Self-Extinguishing
Flame Spread/NFPA 101, ASTM D-84	Class B
Critical Radiant Flux, ASTM E-648	Class I
Abrasion Resistance CS-17 Wheel 1000 GM Load 1000 cycles, ASTM D-4060	10 mg loss
VOC Content	0 g/L

THE SHERWIN-WILLIAMS DIFFERENCE

Sherwin-Williams High Performance Flooring delivers world-class industry subject matter expertise, unparalleled technical and specification service, and unmatched regional commercial team support to our customers around the globe.

United States & Canada

sherwin-williams.com/resin-flooring
swflooding@sherwin.com