

RESUFLOOR™ DECO QUARTZ TQ


Sherwin-Williams Resuflor Deco Quartz TQ is a troweled decorative quartz system comprised of high solids epoxies and colored quartz aggregate. Ideal for resurfacing interior concrete floors, the resulting floor is smooth, aesthetically pleasing and durable. The primary system has a satin, high wear urethane topcoat. Gloss options are also available.

BENEFITS

- Heavy duty and long wearing
- High aggregate load accommodates slope to drain on irregular substrates
- Seamless and impervious
- Wide range of standard and custom colors

USES

- Healthcare and pharmaceutical facilities
- Laboratories and clean rooms
- Food and beverage facilities
- Schools and universities
- Locker rooms and showers

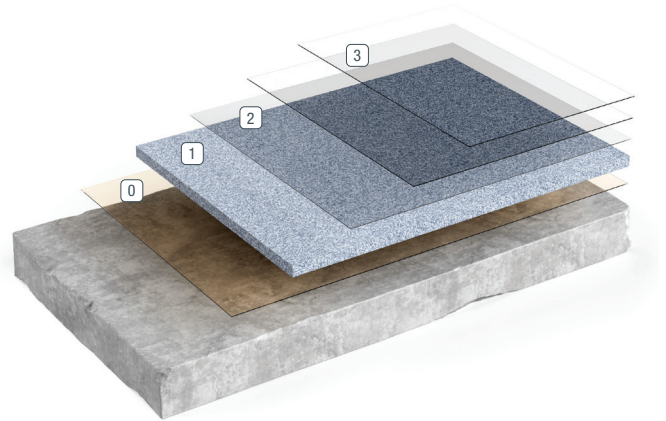

- | | |
|----------|-------------------------|
| 0 Primer | 2 Grout Coats (2 Coats) |
| 1 Mortar | 3 Seal Coat |



ABOUT CHEMICAL RESISTANCE

Sherwin-Williams High Performance Flooring offers a broad range of systems to accommodate nearly every industrial, commercial and institutional setting. Each flooring system includes a standard chemical-resistant topcoat or surface proven to perform under typical conditions.

Important considerations:

- The combination of cleaning solutions, sanitizing chemicals, processing substances and products found in any operational setting is unique.
- Knowing exactly which materials are present — as well as their concentrations and typical exposure times before cleanup — is critical for proper flooring system selection.
- During the specification process, a flooring system's standard chemical-resistant topcoat may get replaced with one better suited to unique facility conditions.

The ability of a flooring system to perform as designed relies heavily on proper selection. Matching each use case with the right chemical-resistant flooring is key to having a facility looking great and functioning at peak level over the long term.

See our Chemical Resistance Guide and other technical resources on our website. Connect with a Sherwin-Williams High Performance Flooring expert for help with specifying an optimal flooring system for your facility.

TYPICAL PHYSICAL PROPERTIES

Color	Standard pre-blended colors; custom color matching available
Abrasion Resistance ASTM D4060 Taber Abraser CS-17 Wheel, 1,000 gram load, 1,000 revolutions.	5.1 mg/loss Result based on independent lab testing of Resutile [™] HTS
Hardness, Shore D ASTM D 2240	80-85 @ 0 sec 75-80 @ 15 sec
Compressive Strength ASTM C 579	11,000 psi
Tensile Strength (binder resin) ASTM D2370	8,000 psi
Adhesion to Concrete ASTM D4541	450 psi (concrete failed)
Adhesion to Concrete ASTM D7234	732 psi (concrete failed)
Flammability ASTM D635	182 mm/min

Results are based on conditions at 77°F

THE SHERWIN-WILLIAMS DIFFERENCE

Sherwin-Williams High Performance Flooring delivers world-class industry subject matter expertise, unparalleled technical and specification service, and unmatched regional commercial team support to our customers around the globe.

United States & Canada

sherwin-williams.com/resin-flooring
swflooring@sherwin.com