

RESUFLO[™] SCREED DECO FLAKE II SYSTEM


Sherwin-Williams Resuflo Screed Deco Flake II System is a nominal 3/16"-1/4" thick decorative floor resurfacer. Comprised of a heavy-duty epoxy mortar, multicolored vinyl flakes and industrial-grade, UV-resistant grout and seal coats, this attractive finish can be used to refurbish existing surfaces or help protect new substrates. It is an ideal option for high-traffic commercial, institutional and industrial settings.

BENEFITS

- Protects substrates from heavy impact and wear
- Brings new life to degraded surfaces
- Sanitary and easy to clean
- Chemical and abrasion resistant
- Wide range of standard and custom flake blends available

USES

- Healthcare and hospitals
- Laboratories and clean rooms
- Pharmaceutical and biotech facilities
- Retail, showrooms and supermarkets
- Restaurants and casinos
- Arenas, stadiums and auditoriums
- Locker rooms and restrooms

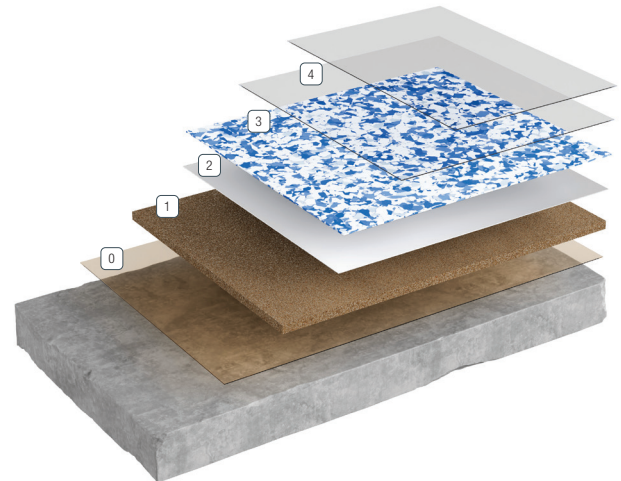

- | | | | |
|---|----------------------|---|----------------------|
| 0 | Primer | 3 | Broadcast |
| 1 | Mortar | 4 | Grout and Seal Coats |
| 2 | Grout/Broadcast Coat | | |



FEATURED COLORS



Flaxseed




Ocelot




Almond Milk



Agave




Meteorite




Husky Gray




Chinchilla



Limestone



Mackerel



Black Bean



Burnt Wood



Moon

Unlimited standard and custom blends available. Please see Resuflo Deco Flake Color Cards for the extensive collection of standard blends or use our Flooring Visualizer Tool to create your own custom blend at floorvisualizer.sherwin-williams.com. This reproduction approximates the actual color. Factors such as the type of product, degree of gloss, texture, size and shape of area, lighting, heat or method of application may cause color variance. Contact your Sherwin-Williams representative for details.

ABOUT CHEMICAL RESISTANCE

Sherwin-Williams High Performance Flooring offers a broad range of systems to accommodate nearly every industrial, commercial and institutional setting. Each flooring system includes a standard chemical-resistant topcoat or surface proven to perform under typical conditions.

Important considerations:

- The combination of cleaning solutions, sanitizing chemicals, processing substances and products found in any operational setting is unique.
- Knowing exactly which materials are present — as well as their concentrations and typical exposure times before cleanup — is critical for proper flooring system selection.
- During the specification process, a flooring system's standard chemical-resistant topcoat may get replaced with one better suited to unique facility conditions.

The ability of a flooring system to perform as designed relies heavily on proper selection. Matching each use case with the right chemical-resistant flooring is key to having a facility looking great and functioning at peak level over the long term.

See our Chemical Resistance Guide and other technical resources on our website. Connect with a Sherwin-Williams High Performance Flooring expert for help with specifying an optimal flooring system for your facility.

TYPICAL PHYSICAL PROPERTIES

Abrasion Resistance ASTM D4060 Taber Abraser CS-17 Wheel, 1,000 cycles	11.7 mg loss Result based on independent lab testing of Resutile [™] HTS
Hardness, Shore D ASTM D2240	80-85 @ 0 sec 75-80 @ 15 sec
Elongation (resin) ASTM D2370	6%
Adhesion to Concrete ASTM D4541	450 psi concrete failure
Adhesion ASTM D7234	732 psi concrete failure
Flammability ASTM D635	182 mm/min

Results are based on conditions at 77°F.

THE SHERWIN-WILLIAMS DIFFERENCE

Sherwin-Williams High Performance Flooring delivers world-class industry subject matter expertise, unparalleled technical and specification service, and unmatched regional commercial team support to our customers around the globe.

United States & Canada

sherwin-williams.com/resin-flooring
swflooding@sherwin.com

©2026 The Sherwin-Williams Company
 High Performance Flooring
 PM-731735-28 04/26