

RESUFLOOR™ SCREED DECO QUARTZ II


Sherwin-Williams Resufloor Screed Deco Quartz II System is a decorative and protective, heavy-duty floor resurfacer. Comprised of an epoxy and silica sand mortar, beautiful colored quartz aggregate and industrial-grade grout and seal coats, the system is installed at a nominal 3/16" thickness. It provides outstanding floor protection wherever durability, performance and attractive decor are required.

BENEFITS


- Protects substrates from impact and wear
- Demonstrates excellent strength in high-use conditions
- Furnishes proven durability in punishing environments
- Resists degradation from many chemicals
- Easy to clean; economical to maintain
- Offered in a range of slip-resistant finishes
- Available in range of colors and blends

USES


- Healthcare and hospitals
- Laboratories and clean rooms
- Pharmaceutical and biotech facilities
- Retail, showrooms and supermarkets
- Restaurants and casinos
- Arenas, stadiums and auditoriums
- Locker rooms and restrooms

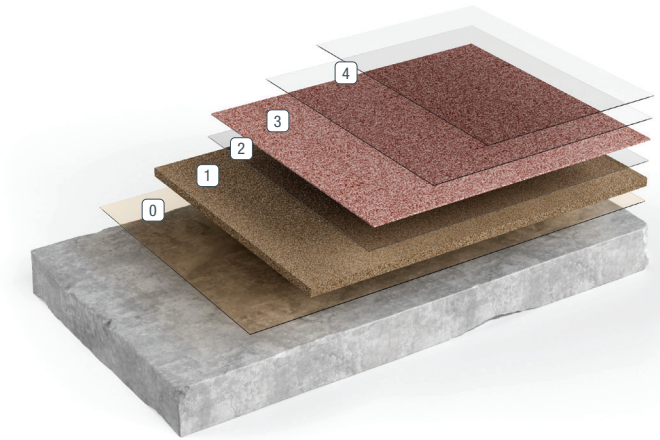


- | | |
|-------------------------------|-------------------------------|
| ① Primer | ③ Broadcast |
| ② Mortar | ④ Grout and Seal Coats |
| ⑤ Grout/Broadcast Coat | |

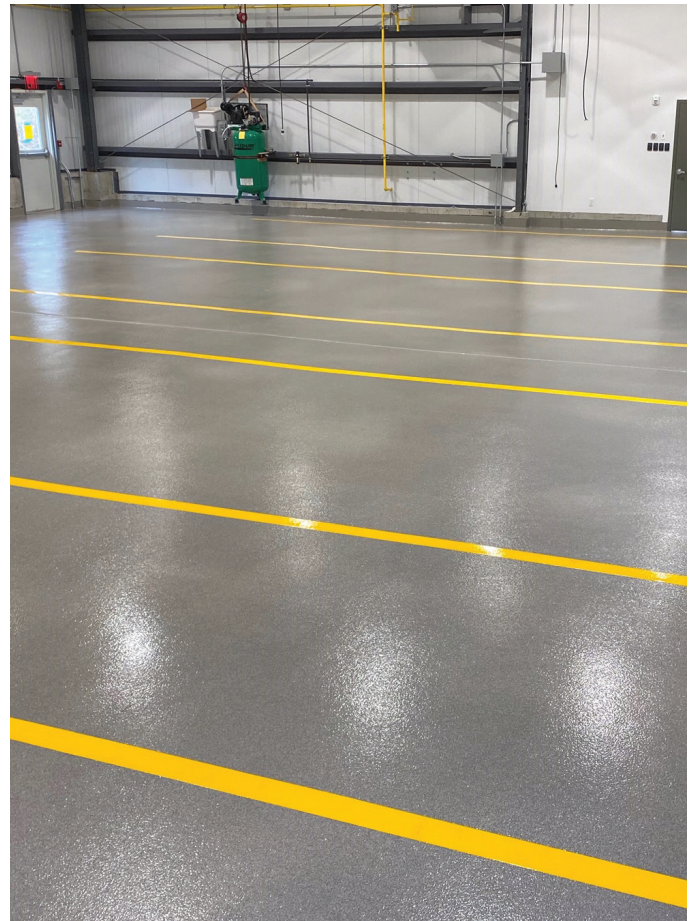


FEATURED COLORS



Blue Slate



Night Sky



New Granite




Brisket



Brindle




Americano




Lagoon



Autumn Spice




Seascape



Redwood



Mud Pie



Grassland

Unlimited standard and custom blends available. Please see Deco Quartz Color Cards for the extensive collection of standard blends or use our Flooring Visualizer Tool to create your own custom blend at floorvisualizer.sherwin-williams.com. This reproduction approximates the actual color. Factors such as the type of product, degree of gloss, texture, size and shape of the area, lighting, heat or method of application may cause color variance. Contact your Sherwin-Williams representative for details.

ABOUT CHEMICAL RESISTANCE

Sherwin-Williams High Performance Flooring offers a broad range of systems to accommodate nearly every industrial, commercial and institutional setting. Each flooring system includes a standard chemical-resistant topcoat or surface proven to perform under typical conditions.

Important considerations:

- The combination of cleaning solutions, sanitizing chemicals, processing substances and products found in any operational setting is unique.
- Knowing exactly which materials are present — as well as their concentrations and typical exposure times before cleanup — is critical for proper flooring system selection.
- During the specification process, a flooring system's standard chemical-resistant topcoat may get replaced with one better suited to unique facility conditions.

The ability of a flooring system to perform as designed relies heavily on proper selection. Matching each use case with the right chemical-resistant flooring is key to having a facility looking great and functioning at peak level over the long term.

See our Chemical Resistance Guide and other technical resources on our website. Connect with a Sherwin-Williams High Performance Flooring expert for help with specifying an optimal flooring system for your facility.

TYPICAL PHYSICAL PROPERTIES

Abrasion Resistance ASTM D4060 Taber Abraser CS-17 Wheel, 1,000 cycles	18 mg loss Result based on independent lab testing of Resutile TM HTS
Hardness, Shore D ASTM D 2240	80-85 @ 0 sec 75-80 @ 15 sec
Elongation (resin) ASTM D2370	6%
Adhesion ASTM D4541	450 psi concrete failure
Adhesion ASTM D7234	732 psi concrete failure
Flammability ASTM D635	182 mm/min

Results are based on conditions at 77°F.

THE SHERWIN-WILLIAMS DIFFERENCE

Sherwin-Williams High Performance Flooring delivers world-class industry subject matter expertise, unparalleled technical and specification service, and unmatched regional commercial team support to our customers around the globe.

United States & Canada

sherwin-williams.com/resin-flooring
swflooring@sherwin.com