

SOFTOP™ COMFORT SL DECORATIVE 1/4" ELASTOMERIC FLOORING


Sherwin-Williams SofTop Comfort SL System combines exciting aesthetics and industry-leading performance with enhanced ergonomic and acoustic benefits. The one-fourth-inch thick, flexible polyurethane surface helps cushion footfall and dampen room noise to support occupant well-being. SofTop Comfort SL is low VOC and formulated with up to 25% renewable plant oils to reduce environmental impact relative to non-biobased alternatives.

BENEFITS

- Extra thick cushioning for added comfort
- Next level sound dampening
- Excellent impact resistance
- Helps bridge concrete cracks
- Beautiful aesthetic possibilities
- Standard and unlimited custom colors
- Outstanding abrasion and chemical resistance
- Seamless and sanitary - no grout lines or heat welds
- Contractor-friendly installation
- Quick curing for faster turnaround
- Slip-resistant and easy to clean
- Can contribute to meeting environmental goals
- Supports facility safety initiatives

USES

- Hospitals and clinics
- Schools and universities
- Pharmaceutical and life science facilities
- Retail and office buildings
- Stadiums and public spaces

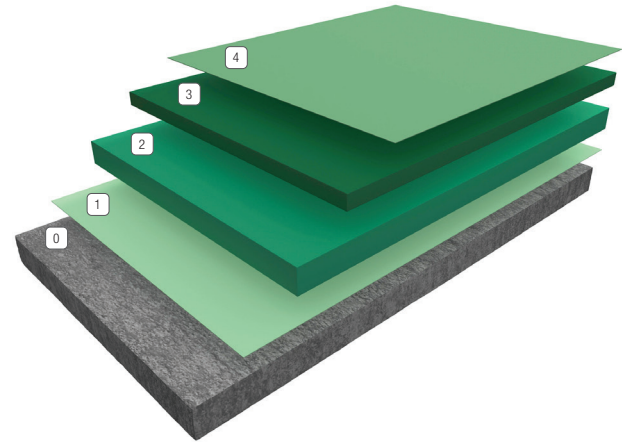

0 Concrete Substrate

1 Primer


2 Membrane

3 Intermediate Coat

4 Topcoat



FEATURED COLORS

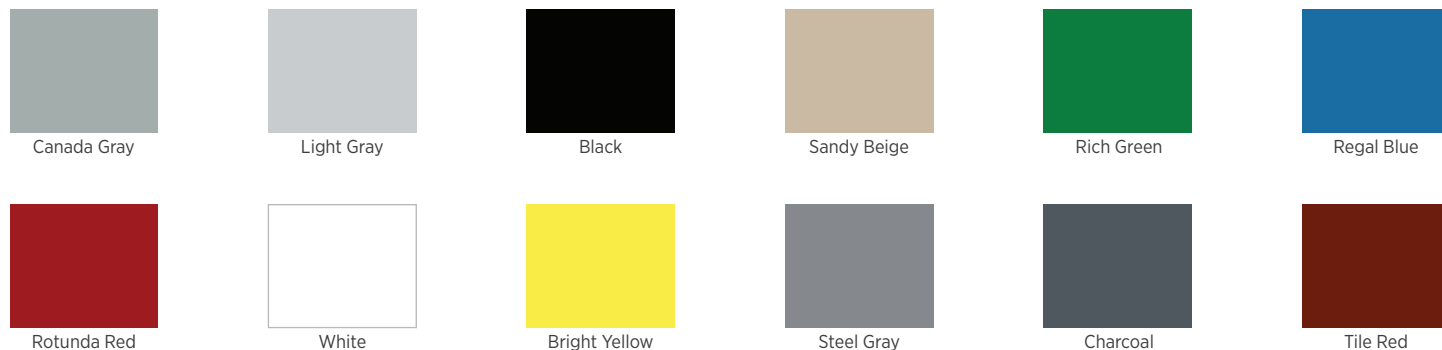

Standard and custom colors available. Please see the Resufloor Standard Industrial Color Card for details or envision a color in your space using our Flooring Visualizer Tool at floorvisualizer.sherwin-williams.com. This reproduction approximates the actual color. Factors such as the type of product, degree of gloss, texture, size and shape of area, lighting, heat or method of application may cause color variance. Contact your Sherwin-Williams Representative for details.

Sherwin-Williams High Performance Flooring offers a broad range of systems to accommodate nearly every industrial, commercial and institutional setting. Each flooring system includes a standard chemical-resistant topcoat or surface proven to perform under typical conditions.

Important considerations:

- The combination of cleaning solutions, sanitizing chemicals, processing substances and products found in any operational setting is unique.
- Knowing exactly which materials are present – as well as their concentrations and typical exposure times before cleanup – is critical for proper flooring system selection.
- During the specification process, a flooring system's standard chemical-resistant topcoat may get replaced with one better suited to unique facility conditions.

The ability of a flooring system to perform as designed relies heavily on proper selection. Matching each use case with the right chemical-resistant flooring is key to a having a facility looking great and functioning at peak level over the long term.

See our Chemical Resistance Guide and other technical resources on our website. Connect with a Sherwin-Williams High Performance Flooring expert for help with specifying an optimal flooring system for your facility.

TYPICAL PHYSICAL PROPERTIES

Abrasion Resistance ASTM D4060	11.9 mg loss (Resutile™ HTS 100)
Hardness, Shore A ASTM D 2240	44 @ 0 sec 43 @ 15 sec (Softop only)
Hardness, Shore D ASTM D 2240	12 @ 0 sec 12 @ 15 sec (Softop only)
Elongation (percent) ASTM D2370	167% (Softop only)
Tensile Strength ASTM D2370	534 psi (Softop only)
Impact Resistance ASTM D2794	>320 in lbs
Recoat Window ASTM D6677	Within 24 hours for all layers
Sound Absorption Coefficient by the Reverberation Room Method ASTM C 423	NRC: 0.10 SAA: 0.09 (Softop SD)

THE SHERWIN-WILLIAMS DIFFERENCE

Sherwin-Williams High Performance Flooring delivers world-class industry subject matter expertise, unparalleled technical and specification service, and unmatched regional commercial team support to our customers around the globe.

United States & Canada

sherwin-williams.com/resin-flooring
swflooring@sherwin.com